



## DOMINI 24 LED

LB6047.552

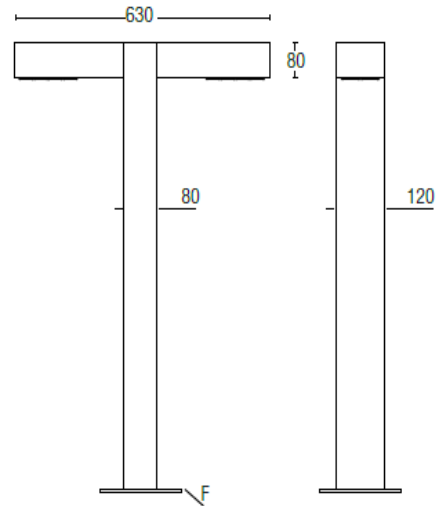

LB6047.552

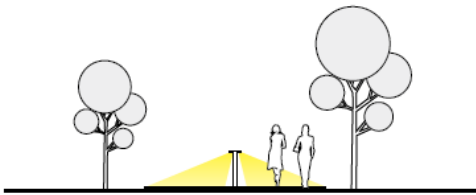

Domini 24 LED

### GENERAL HIGHLIGHTS

- Ideal solution for landscape areas
- Structured with LED light source
- Operating Temperature -40°C / +55°C
- Exceptional thermal characteristics
- In compliance with EN 60598, EN 62722

### ELECTRICAL PROPERTIES

- Drive current: 350mA
- Optimized PCB Design
- Energy class: A
- Input Voltage: 220V - 240V at 50Hz / 60Hz
- Control type: On/Off
- Power factor: > 0.90

## OPTICAL PROPERTIES


- Equipped with LED light source
- No glare with intended use
- High power, undomed LED chips
- Quarter bin LED chips
- MacAdam Elipse 3
- Photobiological safety: Risk group 1
- Lumen output (absolute photometry): 2600lm - 2700lm
- Color temperature: 3000K, 4000K, 2700K (Optional)
- CRI > 70 (4000K), CRI > 80 (3000K)
- ULOR: 0




Landscape Areas



Walkways

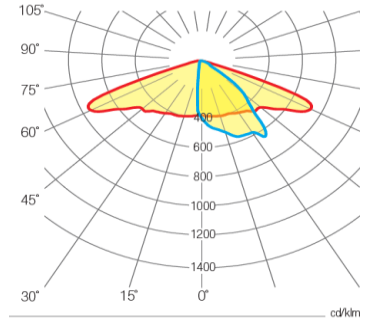

Domini 24 LED

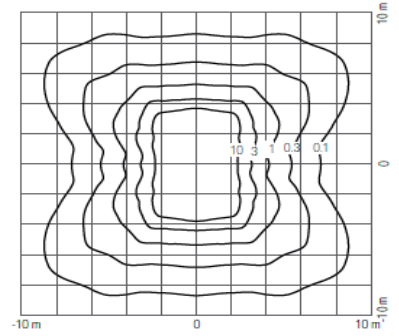

Domini 24 LED

## BODY HOUSING & FINISH

- Corrosion resistant aluminum housing
- Electrostatic powder coating
- HM1 to HM6 standard colors with optional RAL codes
- Ingress protection: IP65
- Impact protection: IK05

## EXTRAS

- Higher CRI LED chips
- Marine grade body

## Finish Options

- HM1 – Special Black
- HM2 – Special Silvery Grey
- HM3 – Special Dark Grey
- HM4 – Special Light Grey
- HM5 – Special White
- Optional RAL codes

## DOMINI 24 LED

CODE	DESCRIPTION	CCT	POWER	LUMEN OUTPUT (System)	ANCHORAGE
LB6047.552	DOMINI 24 LED	3000K / 4000K	28W	2600-2700 lm	90AJ001

## HPR PAZARLAMA A.Ş.

1.OSB Uygurlar Cd.No:1 Sincan 06935, Ankara / Turkey T: +90 312 267 54 30 (pbx) F: +90 312 267 54 31 [info@heper.eu](mailto:info@heper.eu)

We reserve the right to change specifications without prior written notice. Edition: 04.01.2019 For current version visit [heper.eu](http://heper.eu)