
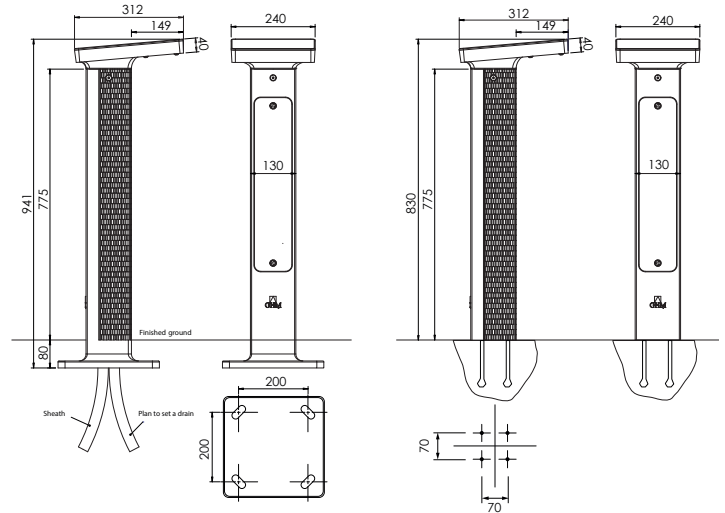


PIXEL

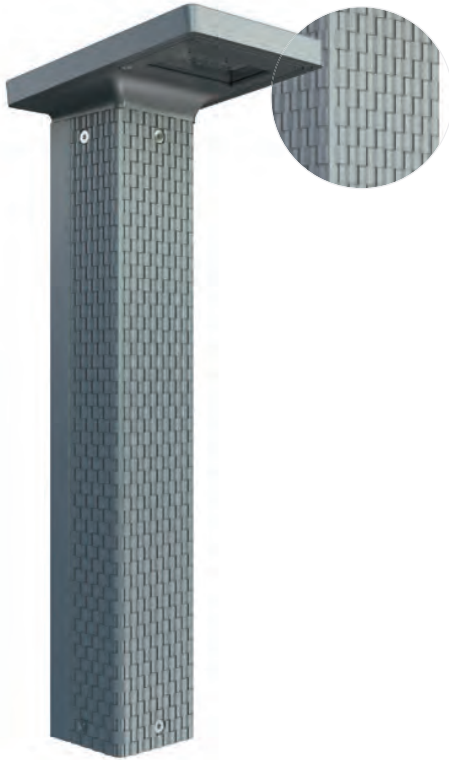

DESCRIPTION

- Lighting head and module in die-cast aluminium
- Metalized cast iron bollard
- Glass Bowl
- Polyester powder coating, any colour available
- IP66 Module
- IK10
- Class I or II
- ORALENS Mono lenses, EAH distribution
- BLS strips
- Colour temperatures: 4000 K and 3000K
- High level of recyclability

INSTALLATION

- Cast iron base plate with center distance 200 x 200mm, or center distance 70 x 70mm with chemical compound


OPTIONS

OPTIONS	PIXEL
POLEDRIVE (set in the bottom of the pole)	✓
Dimming 5 (preset)	✓
DALI (preset)	✓
FC	Compatible with standard version, Dimming 5 or DALI option

Glossary:

EAH : Dedicated LED module for accessibility of disabled persons (PMR), **POLEDRIVE**: preset at the bottom of the pole / night dimming calculator with 2 configurable thresholds, set in the bottom of the pole, **Dimming 5**: night dimming calculator with 5 configurable thresholds, **DALI**: compatible with the DALI protocol, **FC**: Compensated flux

PHOTOMETRIC DISTRIBUTIONS

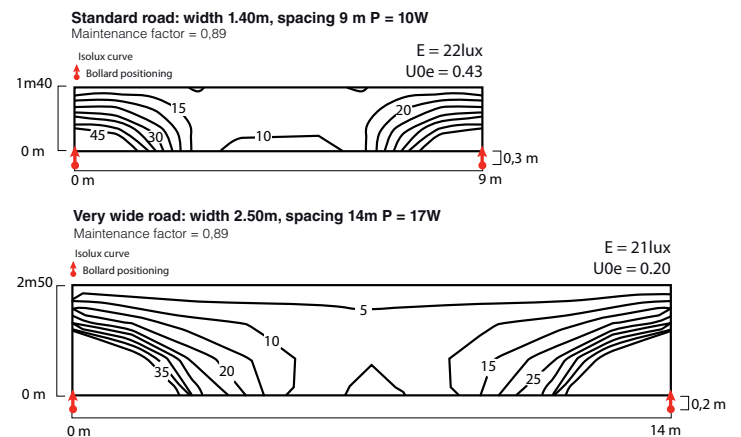

LED Luminaires

Modern Streetfurniture

Waste bins

Bollards Light

tree grill

Bollards

Classic poles cast iron

Steel poles

MODERN POLES CAST IRON

Defence bollards

Drinkwater fountain

SEATING

TRAMWAY POLES

Modern LED luminaires

Classic luminaires

Classic street furniture

Ghm

Rue Antoine Durenne
52220 Sommevoire
France
Tel nr. 0033 3 25 55 23 03

Export internet : www.ghm-eclatec.com

ECLATEC

41 rue Lafayette
54320 Maxeville
France
Tel nr. 0033 3 83 39 38 28

Email export: info@ghm-eclatec.com